

## JOB INFORMATION

FIRST &amp; LAST NAME:

JOB NAME:

JOB ADDRESS:

## DETAILS OF YOUR EXISTING DOOR

For measurement guide reference and correlating letters of the ones below, please see guide on second page.


☐ FLUSH-MOUNT DOOR

## PROVIDE THE NARROWEST DIMENSIONS FOR THE WIDTH &amp; HEIGHT OF DOOR OPENING:

(A) - WIDTH:

(B) - HEIGHT:

For Flush Mount Door, step inside the box, turn around, and measure the inside dimensions of the door opening as highlighted in yellow on the graphic to the left.

☐ OFFSET/INSET DOOR

## (C) - EXISTING RAISED INSULATED FLOOR:

☐ N/A☐ YES (Floor thickness)

EXISTING RAMP:

☐ N/A☐ INTERIOR RAMP☐ EXTERIOR RAMP

## IS IT A COOLER OR A FREEZER?



COOLER



FREEZER

(E) - MEASURE THE EXISTING WALL THICKNESS:

## (D) - LEFT OR RIGHT HINGE?



LEFT HINGE



RIGHT HINGE

ARE THERE ANY OBSTRUCTIONS WITHIN 8" OF THE DOOR OPENING? IF YES, CHECK ALL THAT APPLY.



DOOR VENT





LIGHT SWITCH





THERMOSTAT

## CHOOSE FROM FOUR REPLACEMENT DOOR KIT OPTIONS

## FACE FRAME DOORS

DOOR WITH EXTERIOR  
FACE FRAMEEXTERIOR FACE FRAME  
ONLY (No door)DOOR WITH EXTERIOR FACE  
FRAME & BACK JAMBEXTERIOR FACE FRAME &  
BACK JAMB ONLY (No door)

## L-SHAPED FACE FRAME DOORS

DOOR WITH EXTERIOR  
FACE FRAMEEXTERIOR FACE FRAME  
ONLY (No door)DOOR WITH EXTERIOR FACE  
FRAME & BACK JAMBEXTERIOR FACE FRAME &  
BACK JAMB ONLY (No door)

Wall



Exterior Face Frame



Back Jamb



L-Shape Frame

## SELECT FINISHES &amp; ACCESSORIES

VIEWPORT WINDOW:



N/A



YES (14" x 14")



YES (14" x 24")



WITH HEAT

KICKPLATES:



INTERIOR



EXTERIOR

HEIGHT:

FINISH:



ADT



16 ga. STAINLESS STEEL

## DOOR FINISHES:

INTERIOR:



GALVANIZED (Gray)



WHITE



STAINLESS STEEL



OTHER

EXTERIOR:



GALVANIZED (Gray)



WHITE



STAINLESS STEEL



OTHER

REPLACEMENT PARTS:



THRESHOLD



THERMOMETER



3-WAY LIGHT SWITCH WITH PILOT

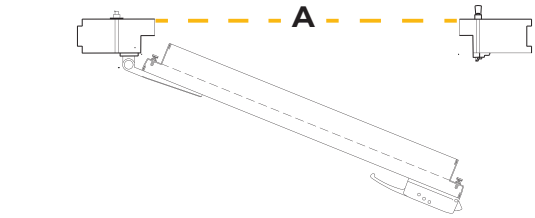
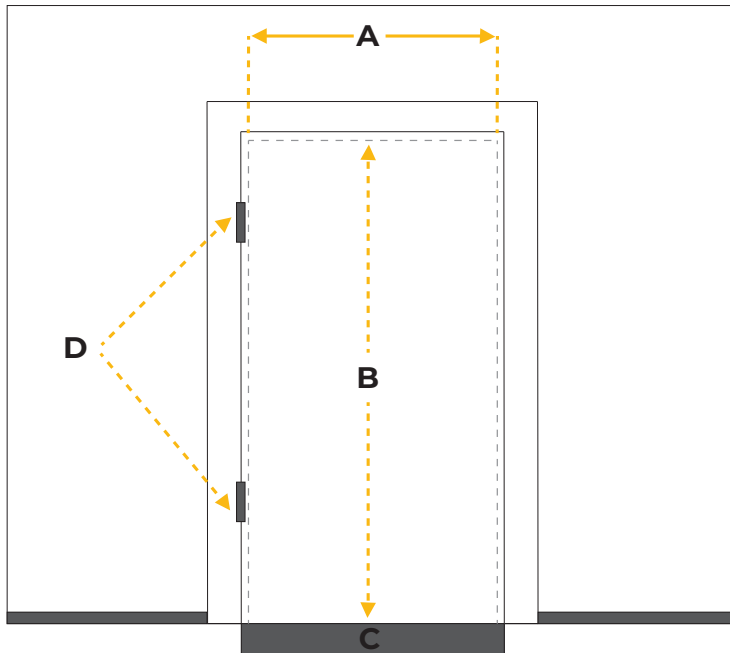


JAMB GUARDS



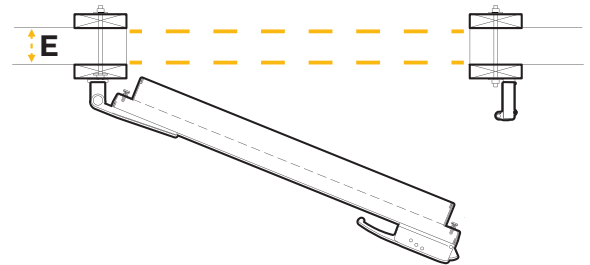
OTHER

## HOW TO MEASURE FOR REPLACEMENT WALK-IN DOORS



### (A) - DOOR OPENING WIDTH

Supply measurements for the narrowest dimension for the width of the door opening. Do NOT include door frame in measurements.



### (E) - WALL THICKNESS

Supply measurements for the thickness of the existing wall. Do NOT include the thickness of the door frame.

### (A) - DOOR OPENING WIDTH

For Flush Mount Door, stand inside the box, turn around, and measure the inside width of the opening. Do NOT include door frame.

### (B) - DOOR OPENING HEIGHT

Stand inside the door and only measure the inside door height. Do NOT include door frame in measurements.

### (C) - EXISTING RAMP

### (D) - DOOR HINGES

Specify if the door hinges are on the left or right side of the door.

## HOW TO ORDER

Save, scan, or take a photo of your quote request/order form and email it to us at [doors@everidge.com](mailto:doors@everidge.com). Include your contact information and we will confirm pricing and approximate lead time for shipping. Normal lead time is 10 to 15 working days. All freight is FOB. Freight costs will be added to your quote/invoice.

**Please Note: Customer is responsible for verifying all dimensions before ordering door.**



**CROWNTONKA** **ICS** **LOTEMP DOORS** **PREPRITE** **SMARTRITE** **THERMALRITE**

Proud to be family-owned.

Walk-In Coolers/Freezers • Restoration & Replacement Doors • Cook-Chill Specialty Solutions • Parts, Service & Warranty • Construction Services  
15600 37th Ave N • Suite 100 • Plymouth, Minnesota 55446 •  
888-227-1629 • [www.everidge.com](http://www.everidge.com) • [info@everidge.com](mailto:info@everidge.com)