

Project Name : \_\_\_\_\_

Location : \_\_\_\_\_

Item # : \_\_\_\_\_

**TYPE:** Blast Chiller/Freezer    **MODEL:** PBF-15.0



### PRODUCT DESCRIPTION

Built to meet the demands of higher-capacity professional kitchens, the PrepRite<sup>®</sup> PBF 15.0 fits naturally into established foodservice workflows while delivering consistent and reliable chilling performance. The unit supports HACCP-compliant cook/chill processes using an ambient chill method and indirect air circulation designed to ensure uniform cooling and promote food quality and safety.

Manufactured with environmental responsibility in mind, the PBF 15.0 combines advanced technology with durable performance features to safeguard long-term investment. The result is efficient operation, reduced utility costs, improved food safety, and strong overall value in today's competitive foodservice market.

### STANDARD FEATURES


- Ambient chill method
- Indirect air circulation to improve food quality
- HACCP compliant; self-contained refrigerated system
- Electronic touch screen control; user friendly and programmable for up to 99 recipes
- USB port; front mounted for easy access to download data, such as HACCP, or upload recipes
- Automatic hot gas defrost
- Rounded interior corners for simple cleaning
- Single point product probe
- Slide out refrigeration system for efficient service access
- Stainless steel rack system for pans or shelves
- Snap-in magnetic gasket for straightforward changes or cleaning
- Self-closing door, right-hand hinged
- Casters for effortless movement, front casters can be swivel, fixed or locked
- 304 Stainless steel interior and exterior front, sides, and top.
- Refrigerant: R404
- Environmentally friendly HFO insulation

### OPTIONAL ACCESSORIES

- Plastic coated shelves
  - UV sanitizer
  - Heated multi-point probe
  - Three core probe kit
  - Left-hand door
  - Door bolt lock
- Specifications subject to change without notice.

### WARRANTY

- Three year warranty on parts and labor
- Additional warranty for years 3-5 on compressor (parts only)

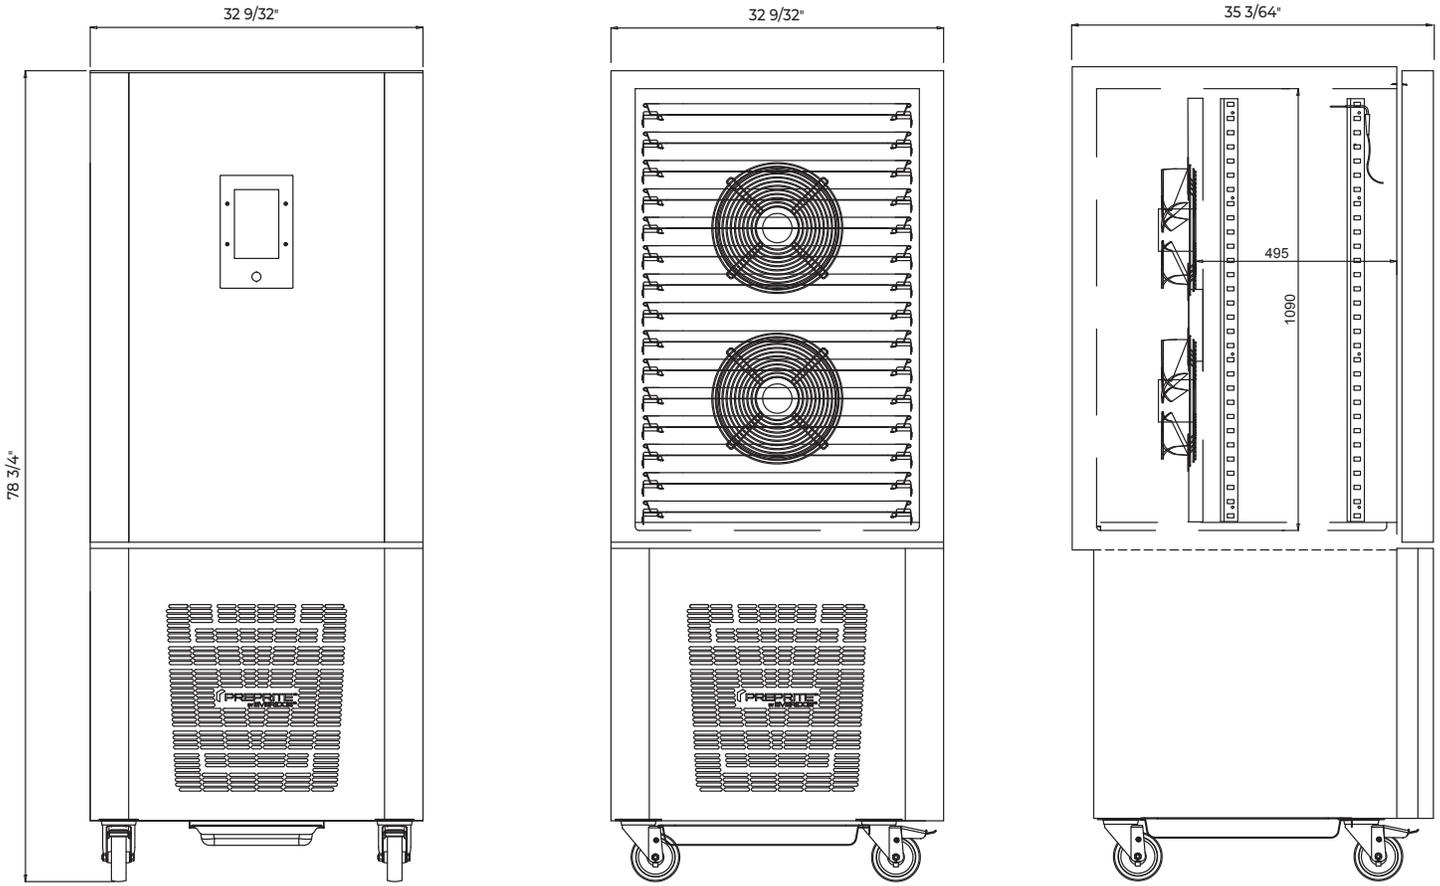

FRONT VIEW

INSIDE VIEW

SIDE VIEW

**MODEL: PBF 15.0**

CAPACITY	OUTPUT CHILLING CAPACITY
15 pans 18" x 26" x 1" deep Pans not included	+194/+37°F 110 lbs within 90 minutes
DISTANCE	OUTPUT FREEZING CAPACITY
Between shelves 2.69"	+194/0°F 70 lbs within 240 minutes
OUTSIDE DIMENSIONS	OUTPUT THAWING CAPACITY
32.25" (W) x 35" (D) x 78.25" (H)	0°F/38°F 22 lbs within 240 minutes
INTERIOR DIMENSIONS	0°F/38°F 44 lbs within 480 minutes
27.5" (W) X 19.5" (D) X 43" (H)	0°F/38°F 66 lbs within 720 minutes
WEIGHT	HEAT LOAD BTU/HR
520 lbs	16,578 - 10° F evaporator temperature/104° F ambient
SHIPPING DIMENSIONS	ELECTRICAL SUPPLY
34" (W) X 38" (D) X 84" (H)	208-240 V/1 PH/60 Hz (3 PH optional)
SHIPPING WEIGHT	RLA/LRA/MOP: 12/102/33
560 lbs	40 A circuit, # 8 wire required

**Notes:** The installation of the blast chiller/freezer and the installation of the remote condensing unit must be performed by a qualified professional. All specifications are subject to change without notice.

