

TYPE: Blast Chiller/Freezer MODEL: PBF-7.0



OPTIONAL ACCESSORIES

- Plastic coated shelves
 - UV sanitizer
 - Heated multi-point probe
 - Three core probe kit
 - Left-hand door
 - Door bolt lock
- Specifications subject to change without notice.

WARRANTY

- Three year warranty on parts and labor
- Additional warranty for years 3-5 on compressor (parts only)


PRODUCT DESCRIPTION

The PrepRite[®] PBF 7.0 is engineered to integrate easily into professional kitchen operations, supporting reliable and consistent chilling performance. Its ambient chill method and indirect air circulation help promote uniform temperature reduction while supporting HACCP guidelines for cook/chill applications and improved food safety.


Built with environmental responsibility as a priority, the PBF 7.0 features advanced technology and carefully engineered components that help protect product integrity. Its efficient operation contributes to reduced energy consumption, improved food safety, and long-term value for modern foodservice environments.

STANDARD FEATURES


- Ambient chill method
- Indirect air circulation to improve food quality
- HACCP compliant; self-contained refrigerated system
- Electronic touch screen control; user friendly and programmable for up to 99 recipes
- USB port; front mounted for easy access to download data, such as HACCP, or upload recipes
- Automatic hot gas defrost
- Rounded interior corners for simple cleaning
- Single point product probe
- Slide out refrigeration system for efficient service access
- Stainless steel rack system for pans or shelves
- Snap-in magnetic gasket for straightforward changes or cleaning
- Self-closing door, right-hand hinged
- Casters for effortless movement, front casters can be swivel, fixed or locked
- 304 Stainless steel interior and exterior front, sides, and top.
- Refrigerant: R404
- Environmentally friendly HFO insulation

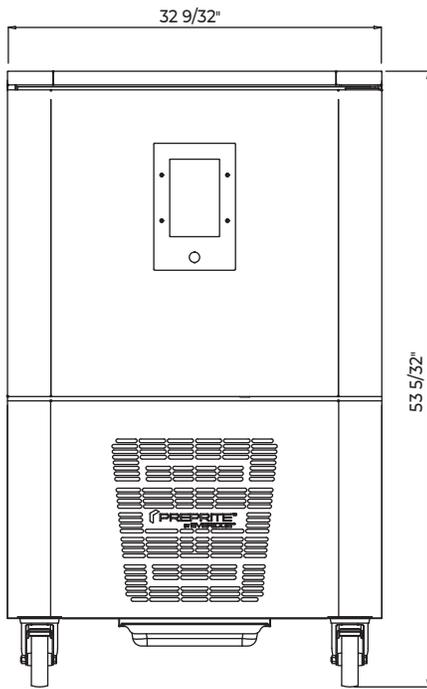

FRONT VIEW

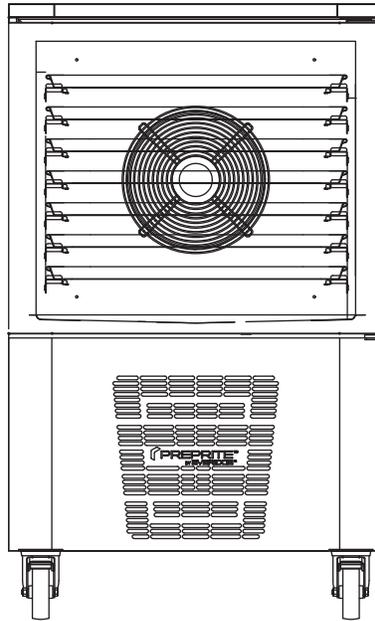

BACK VIEW

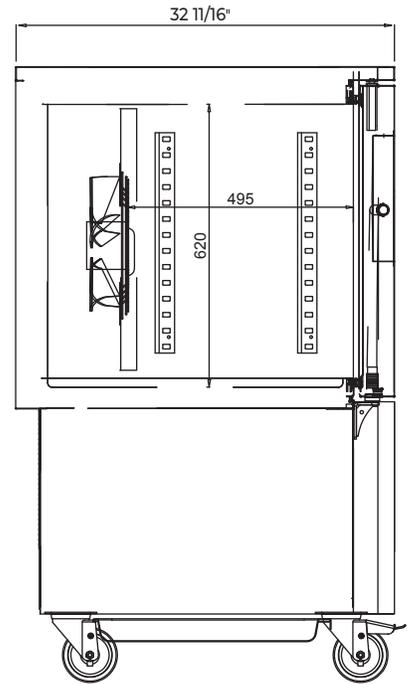

SIDE VIEW

MODEL: PBF 7.0

CAPACITY	OUTPUT CHILLING CAPACITY
7 pans 18" x 26" x 1" deep Pans not included	+194/+37°F 55 lbs within 90 minutes
DISTANCE	OUTPUT FREEZING CAPACITY
between shelves 2.69"	+194/0°F 35 lbs within 240 minutes
OUTSIDE DIMENSIONS	OUTPUT THAWING CAPACITY
32.25" (W) X 32.625" (D) X 53.25" (H)	0°F/38°F 11 lbs within 240 minutes
INTERIOR DIMENSIONS	0°F/38°F 22 lbs within 480 minutes
27.5" (W) X 19.5" (D) X 25" (H)	0°F/38°F 33 lbs within 720 minutes
WEIGHT	HEAT LOAD BTU/HR
355 lbs	11,199- 10° F evaporator temperature/104° F ambient
SHIPPING DIMENSIONS	ELECTRICAL SUPPLY
34" (W) X 34" (D) X 60" (H)	208-240 V/1 PH/60 Hz
SHIPPING WEIGHT	RLA/LRA/MOP: 4.3/54/12
385 lbs	30 A circuit, # 10 wire required

Notes: The installation of the blast chiller/freezer and the installation of the remote condensing unit must be performed by a qualified professional. All specifications are subject to change without notice.

